



AQUA WATER STORAGE UNDERGROUND TANK

(AUF-SERIES)



MATERIALS	
Components	Materials
1. Tank Body	Fiber Reinforced Plastic (FRP)
2. Manhole cover	ABS (Acrylonitrile-Butadiene-Styrene)
3. Inlet - Outlet pipe	PVC CLASS 13.5
4. Suction	PVC CLASS 13.5
5. Float Valve	Brass
6. Foot Valve	Brass
7. Air Vent pipe	PVC CLASS 13.5

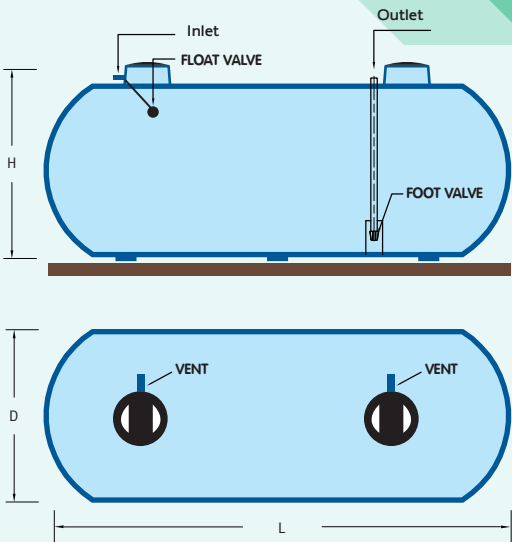

Quality, strong and durable.
The tank bodies are constructed of fiberglass reinforced plastic and without additives (Filler). Suitable for reserve water for consumption.
Produced in accordance with ISO 9001.

DIMENSION (mm.)								
Model	AUF-20000H-2.5	AUF-25000H-2.5	AUF-30000H-2.5	AUF-35000H-2.5	AUF-40000H-2.5	AUF-45000H-2.5	AUF-50000H-2.5	AUF-55000H-2.5
Diameter (D) (mm.)	2500	2500	2500	2500	2500	2500	2500	2500
Height (H) (mm.)	2750	2750	2750	2750	2750	2750	2750	2750
Length (L) (mm.)	4850	5900	6950	8050	9100	10200	11250	12000
Inlet pipe / Float Valve (mm.)	40	40	40	40	40	40	40	40
Outlet pipe / Foot Valve (mm.)	65	65	65	65	65	65	65	65
Air Vent pipe (mm.)	65	65	65	65	65	65	65	65
Capacity (cu.m)	20	25	30	35	40	45	50	55

*The company reserves the right to make changes or revisions to the information contained in this document without prior notice.



QSP-SL-07-43(0)-EN

AQUA NISHIHARA CORPORATION LIMITED

202/12 Soi Prawit Lae Phuean, Prachachuen Road,
Ladyao, Jatujak, Bangkok 10900
Tel.(+66) 2954 3341-4,(+66) 2589 9717

www.aqua.co.th
Sales@aqua.co.th
@aquanishihara
fanpage.anc

