


AQUA UNDERGROUND TANK

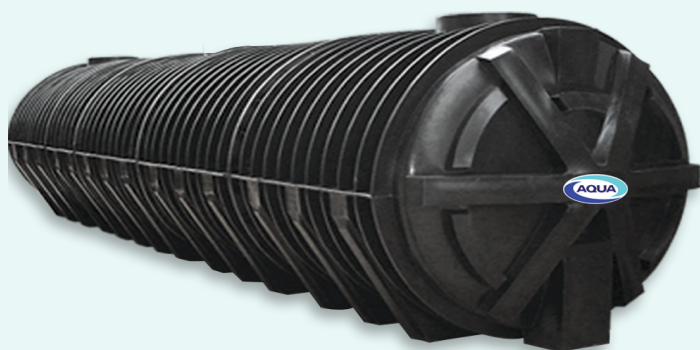

MATERIALS

Components	Materials
1. Tank Body	polyethylene (PE) LLDPE (Linear Low Density Type Medium Density)
2. Manhole cover	ABS (Acrylonitrile-Butadiene-Styrene)
3. Inlet - Outlet pipe	PVC CLASS 13.5
4. Suction	PVC CLASS 13.5
5. Float Valve	Brass
6. Foot Valve	Brass
7. Air Vent pipe	polyethylene (PE) HDPE (High Density Polyethylene)

The tank bodies are constructed of polyethylene material that has been cleaned and safe from *The US Food And Drug Administration (FDA) Regulation 177.1520*. Suitable for reserve water for consumption. Which is strong and durable in use with certified standards ISO9001.

DIMENSION (mm.)

Model	AUT-7500H	AUT-8500H	AUT-10000H	AUT-15000H	AUT-18000H	AUT-20000H	AUT-25000H
Diameter (D) (mm.)	1900	1900	1900	1900	1900	1900	1900
Height (H) (mm.)	1950	1950	1950	1950	1950	1950	1950
Length (L) (mm.)	3840	4290	4740	7370	8460	9360	11990
Inlet pipe / Float Valve (mm.)	25	25	25	40	40	40	40
Outlet pipe / Foot Valve (mm.)	50	50	50	65	65	65	65
Air Vent pipe (mm.)	50	50	50	65	65	65	65
Capacity (cu.m.)	7.6	8.6	10	15.3	18	20.2	25.6

*The company reserves the right to make changes or revisions to the information contained in this document without prior notice.



QSP-SL-07-28(0)-EN

AQUA NISHIHARA CORPORATION LIMITED

202/12 Soi Prawit Lae Phuean, Prachachuen Road,
Ladyao, Jatujak, Bangkok 10900
Tel.(+66) 2954 3341-4,(+66) 2589 9717

www.aqua.co.th
Sales@aqua.co.th
@aquanishihara
fanpage.anc

